


BM6 HYDRAULIC MOTOR

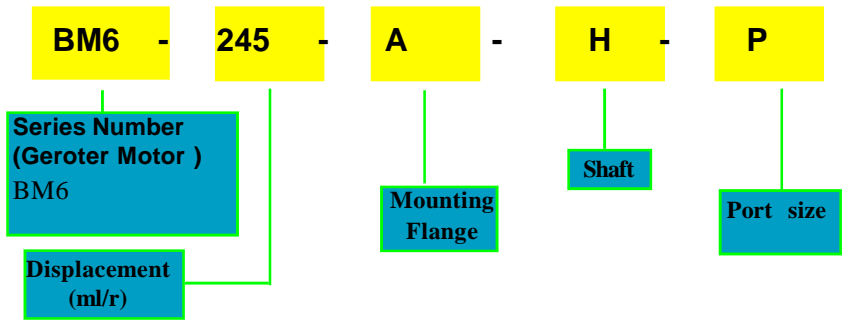

Codes Specification

DISPL. (ml/r)	MOUNTING FLANGE		SHAFT (KEY)		PORT SIZES			
			(mm)					
195 *	A	4 Bolt Flange Pilot $\Phi 5"$ (127mm) bolt 4x $\Phi 0.57"$ (14.5mm) pos. $\Phi 6.38"$ (162mm)	H	KEY SHAFT $\Phi 1.5"$ (38.1mm)	KEY 0.38" X2.25" (9.56x57.15mm)	C	2XG3/4" Screw hole 4- M10	Drain G 1/4"
245 *			I	KEY SHAFT $\Phi 1.575"$ (40mm)	KEY 0.47" X2.76" (12x70mm)	P	2XG1/2"	Drain G 1/4"
310 *	B	4 Bolt Flange Pilot $\Phi 6.3"$ (160mm) Bolt 4- $\Phi 0.71"$ (18mm), pos. $\Phi 7.87"$ (200mm)	J	SPLINE SHAFT $\Phi 1.5"$ (38.1 mm)	17 Tooth 3/8-16 UNC	Q	2XM27X2 Screw hole 4- M10	Drain M14X1.5
395 *			K	Tapered Shaft $\Phi 2.25"$ (cone 1:8)	Key $\Phi 10.44"$ x1.25" (1.14x31.75mm)	R	2XG 1" Screw hole 4- M12	Drain M14X1.5
490 *	C	4 Bolt Flange Pilot $\Phi 7.09"$ (180mm) Bolt 4- $\Phi 0.71"$ (18mm), pos. $\Phi 8.82"$ (224mm)	L	KEY SHAFT $\Phi 2.25"$ (57.15 mm)	Key 0.5" X2.76" (12.7x70mm)	S	2X1 5/16 -12UN	Drain 9/16- 18UNF
625 *			N	SPLINE SHAFT $\Phi 2.125"$	16 Tooth 3/8-16 UNC	T	2X1 1/16 -12UN	Drain 9/16- 18UNF
800 *								
985								

Order coding: for example, BM-195-A-K-V, which Motor is 4.9 in³/r (185 ml/r) displacement, 4 bolts flange 3.25" Dia. woodruff key shaft 1" Dia. 1/2" NPT ports.